

# ***Pedal Packer Safety Information***


**[www.99bikes.com.au](http://www.99bikes.com.au)**



# Pedal Packer Safety Information


## • Loading safety and weight limitations

- When loading be mindful of proper weight balance, and do not over-load the bike. Excessive load, carrying weight too high or a load which is in excess of the rider's weight can create an unbalanced bike with can be difficult to ride safely.
- Ensure your load is tethered securely to the bike and does not shift whilst riding.
- Be mindful that rear passenger movement will affect bike behaviour, always familiarise all riders in a safe environment.

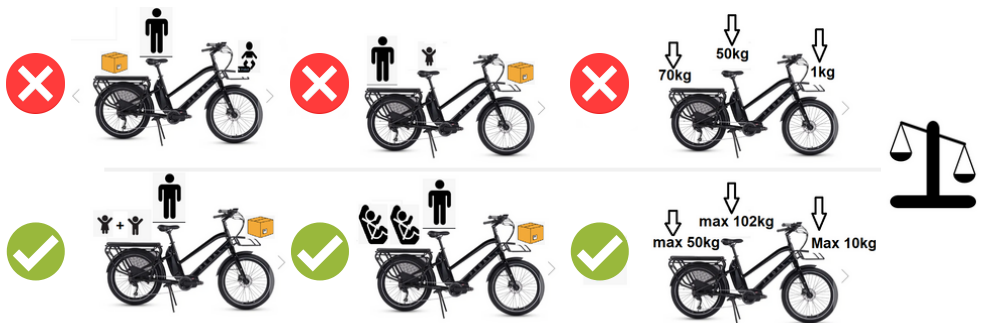

## • 48V Battery System

- This bike uses a 48V electric system, which is higher voltage than many other eBikes.
- Ensure you only use the original or an approved charger.
- Keep the charger port dry, always first check for moisture.
- Do not charge in direct sunlight, keep cool whilst charging.
- Do not charge outdoors or in the rain.
- It is recommended to charge lithium ion batteries in an area with good access and good ventilation.
- When connecting the charge, ensure the wall power is OFF before connecting to the bike or either of the batteries.



# Pedal Packer Safety Information

- **Tyre Pressures**

- Tyre pressure should be varied according to the bicycle's loading conditions.



- **Downtube Battery Deadlock safety catch usage**

- Before every ride, always check the Battery Deadlock is firmly engaged in the LOCK position towards the battery.



- **Seat Tube battery isolator switch**

- The seat tube battery is removable and features it's own power switch on the battery. You will need to turn this on for first use. To do this, remove the battery from the bike and switch the power switch on the top of the battery by the carry handle to the 'ON' position.



# *Pedal* **Packer Safety Information**

## **Technical Specifications**

Tyre Pressure (Light Loading)	28-30psi
Tyre Pressure (Heavy Loading)	30-38psi
Max. Tyre Size (inch)	24 x 3.0"
Min. Tyre Size (inch)	24 x 2.6"
Valve Type	Schrader (American/Standard)
Max. Brake Rotor Size	180mm
Rack Fixture Bolts M6	9nm
Rack Fixture Bolts M5	7nm
Wheel Nuts Tightening	20nm
Charger Spec	54V, 3A, 5.5mm DC Plug
Battery Type	Lishen lithium-ion
Approx. Bike Weight	38kg
Max. Front Rack Weight	10kg
Max. Rear Rack Weight	50kg
Max. Rider Weight	102kg
Total Allowable Bike Weight (GVM)	~200kg
Gear Cable Length	3m (for tandem)
Chain Length	138 link

# *Pedal*

Please check for an updated user manual through  
[www.pedalbikes.com.au](http://www.pedalbikes.com.au) or [www.99bikes.com.au](http://www.99bikes.com.au)

***Any other questions please contact your  
retailer or visit [www.99bikes.com.au](http://www.99bikes.com.au)***